

Product data sheet – Insulating plug

Product description

The Eurotec **insulating plug** is suitable for direct anchorages in expanded polystyrene, rigid-foam boards and other soft building materials. During installation, the plug's conical shape causes compaction of the material surrounding the point where it is screwed in, therefore ensuring a secure plug grip.

Advantages

- no need for pilot-drilling in soft materials
- direct installation without separate plugs
- includes seal ring
- installation without creating thermal bridges
- no hammering of screws thanks to TX drive



Instructions for use

Attachment of wall-connection profiles, plinth protection strips, sheet metal, plaques, lighting, signs, boxes, etc. directly to composite thermal insulation systems.


Suitable construction materials:

composite thermal insulation systems, polystyrene boards (EPS, XPS), rigid foam boards, expanded polystyrene boards.

Article table

Isolierdübel Zinkdruckguss mit Dichtscheibe						
Art. no.	Dimensions Ød x L [mm]	Thread length lg [mm]	Head diameter Ød x L [mm]	Drive	Material	PU [pcs.]
200036	13 x 65	65	15	TX 30	Zinkdruckguss	100

Drawing

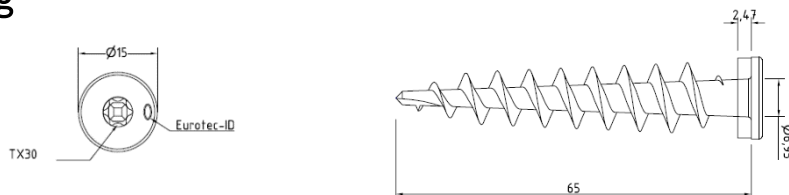

It is imperative that you contact our application technology department if you are not familiar with this product's use, and especially with its use in accordance with the regulations.