

## Product data sheet – Bugle-head screw

## Product description

The bugle head screw is used to fasten the roof membrane on trapezoidal sheets. Combined with a washer ensures the roof membrane is optimally fixed on the trapezoidal sheet.

## Properties

- Carbon steel
- Steel, case-hardened and double-coated
- Drill bit
- Bugle head
- Special thread for optimal hold



## Product table


Art. no.	Dimensions [mm]	Drive	PU**
111303*	4,8 x 35	TX25 •	1000
111304*	4,8 x 50	TX25 •	1000
111305*	4,8 x 60	TX25 •	1000
111306	4,8 x 70	TX25 •	1000
111307*	4,8 x 80	TX25 •	500
111308*	4,8 x 90	TX25 •	500
111309*	4,8 x 100	TX25 •	500
111310*	4,8 x 110	TX25 •	500
111311*	4,8 x 120	TX25 •	500
111312*	4,8 x 130	TX25 •	500
111313*	4,8 x 140	TX25 •	500
111314*	4,8 x 150	TX25 •	500
111315*	4,8 x 160	TX25 •	500
111316*	4,8 x 170	TX25 •	500
111317*	4,8 x 180	TX25 •	500
111318*	4,8 x 200	TX25 •	500
111319*	4,8 x 220	TX25 •	500
111320*	4,8 x 240	TX25 •	500
111321*	4,8 x 260	TX25 •	500
111322*	4,8 x 280	TX25 •	250
111323*	4,8 x 300	TX25 •	250

\* On request

\*\* Plates not included with product


## Product data sheet – Bugle-head screw

### Drawing

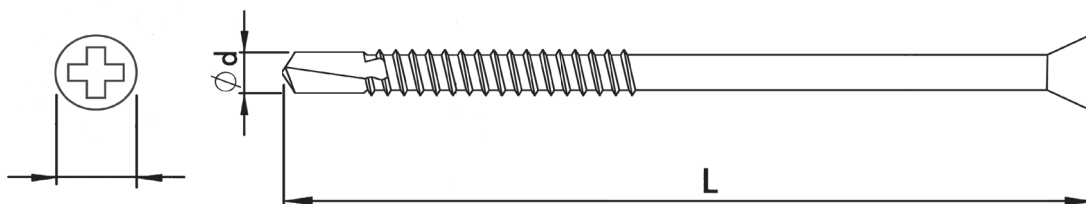

### Application range

For use on steel profile sheeting

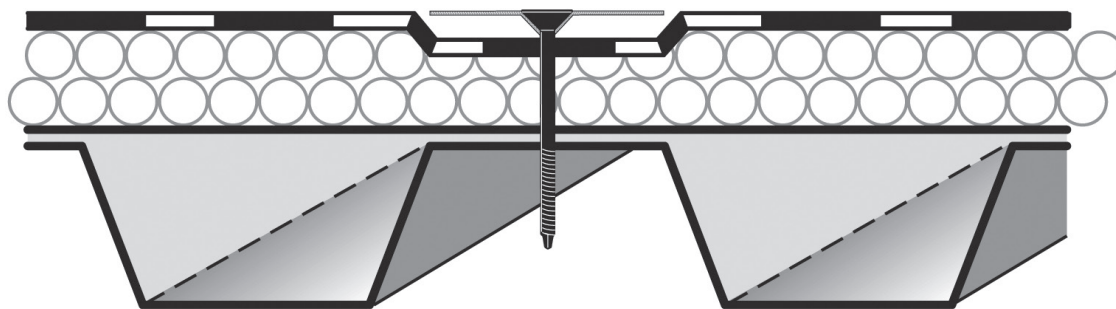

If you are not familiar with how this product is used, and particularly with the product's intended use, please contact our Application Technology department (Technik@eurotec.team).