

PRODUCT DATA SHEET

SPACER SCREW MINI

PRODUCT DESCRIPTION

The Spacer screw mini is suitable for fastening wooden substructures for wall and ceiling cladding, and for ridge and hip batten installation. Unlike conventional screws, the Spacer screw mini has two different threads on the head and tip. The head thread holds the counter batten (at a distance) in place. The thinner tip thread is used for fastening in the substructure. To prevent the counter batten from splitting, we recommend pre-drilling the counter batten (drill diameter = $\text{Ødh} - 2 \text{ mm}$).

MATERIAL

Hardened carbon steel, galvanized, slide-coated

- Can be used in service classes 1 and 2 according to DIN EN 1995 (Eurocode 5)
- Corrosion resistant
- Good resistance to mechanical stresses
- Not suitable for wood containing tannins

CERTIFICATION


- European standard EN 14592:2012-07




PRODUCT DATA SHEET

SPACER SCREW MINI


TECHNICAL INFORMATION

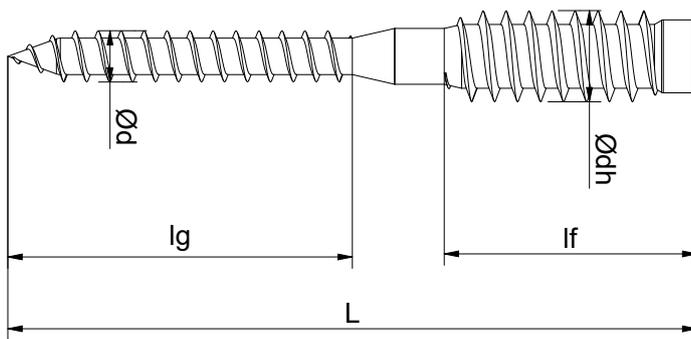

Side view



Top view

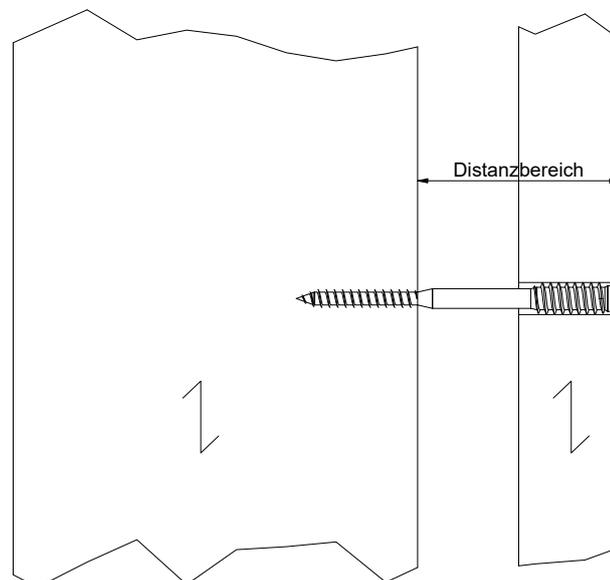

INSTRUCTIONS FOR USE

The distance cannot be adjusted after installation.

PRODUCT DATA SHEET

SPACER SCREW MINI

PRODUCT TABLE

Spacer screw mini								
Art. no.	Tip diameter Ød x L [mm]	Thread length tip lg [mm]	Thread diameter tip Ød [mm]	Thread length head lf [mm]	Head diameter Ødh [mm]	Distance range [mm]	Drive	PU
110121	4,5 x 60	30	4,5	22	8,0	20 – 35	TX25 •	200
110122	4,5 x 80	30	4,5	22	8,0	40 – 55	TX25 •	200
110123	4,5 x 100	30	4,5	22	8,0	60 – 75	TX25 •	200
110124	4,5 x 120	30	4,5	22	8,0	80 – 95	TX25 •	200

If you are unfamiliar with the application of this product, in particular with its intended use, please contact our Application Engineering department (technik@eurotec.team).