

PRODUCT DATA SHEET

LIGHT FLAT CONNECTOR

PRODUCT DESCRIPTION


Our light flat connectors are used for easily attaching narrow wooden parts. Their simple assembly makes them an alternative to perforated panel strips. A further advantage is that they can be fixed to concrete substrates with our bolt anchor or our rock concrete screw. We offer our light flat connectors with a thickness of 2, 2.5 and 3 mm.

ADVANTAGES


- Quick and easy assembly
- Broad range of application
- Mounting on concrete substrates also possible



APPLICATION IMAGES

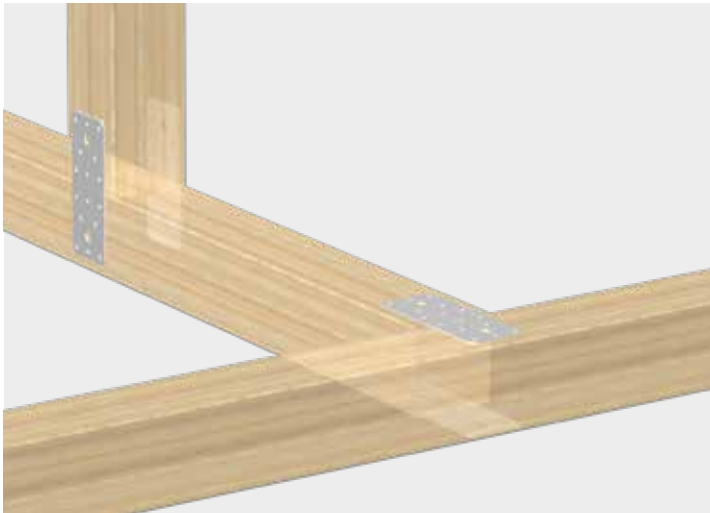

Quick and easy connection of several wooden elements with the light flat connector.

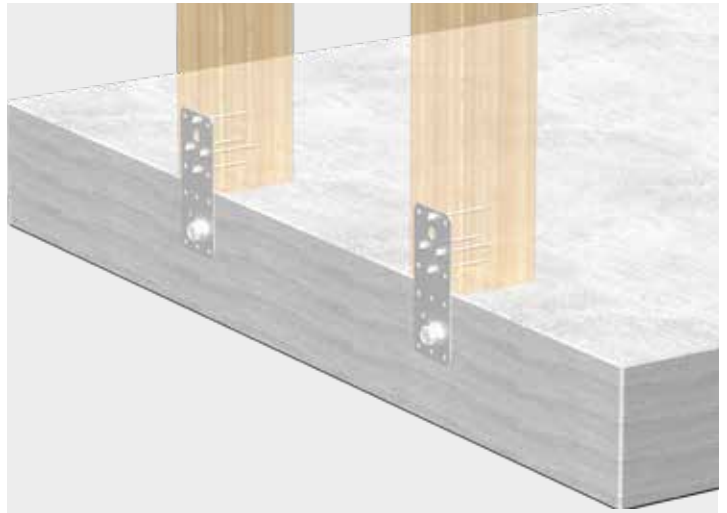

Simple assembly of two wooden elements on a concrete slab with the light flat connector.

PRODUCT DATA SHEET

LIGHT FLAT CONNECTOR

MATERIAL

- Steel plate DX 51D + Z 275

PRODUCT TABLE


Art. no.	Product description	Height [mm]	Length [mm]	Width [mm]	Material	PU
904114	Light flat connector	95	40	2,5	Steel plate DX 51D + Z 275	150
904115	Light flat connector	175	40	3,0	Steel plate DX 51D + Z 275	100
904116	Light flat connector	135	55	2,0	Steel plate DX 51D + Z 275	100

PRODUCT DATA SHEET

LIGHT FLAT CONNECTOR

DRAWINGS


- Flat connector D x B40 x L

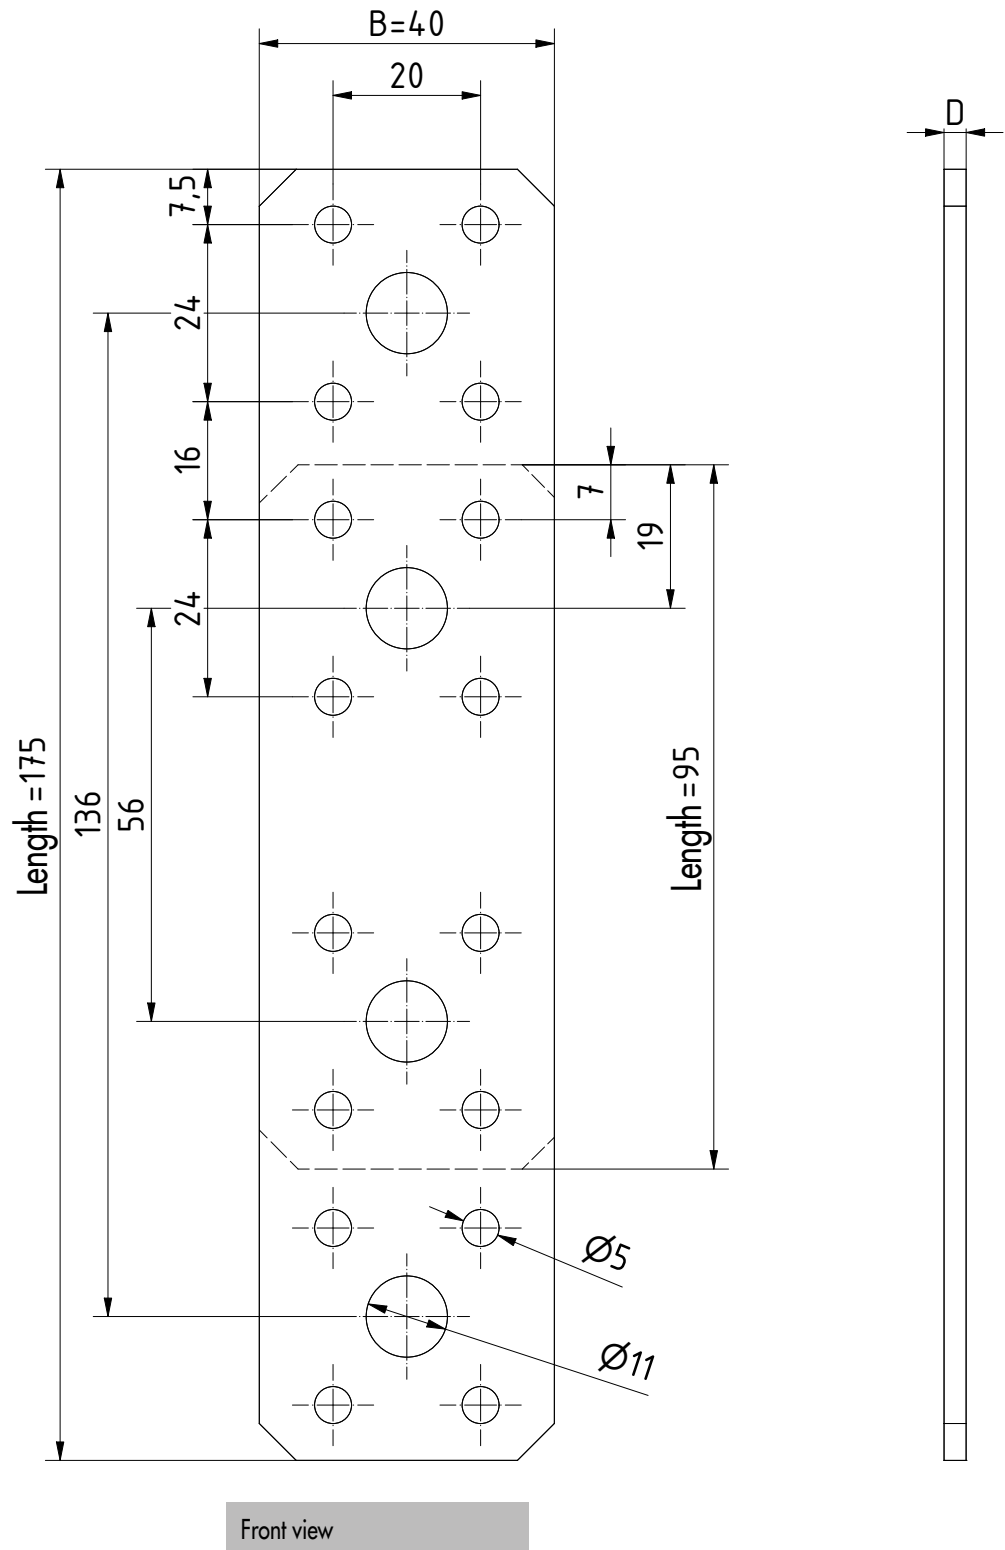

PRODUCT DATA SHEET

LIGHT FLAT CONNECTOR

- Flat connector D x B55 x L

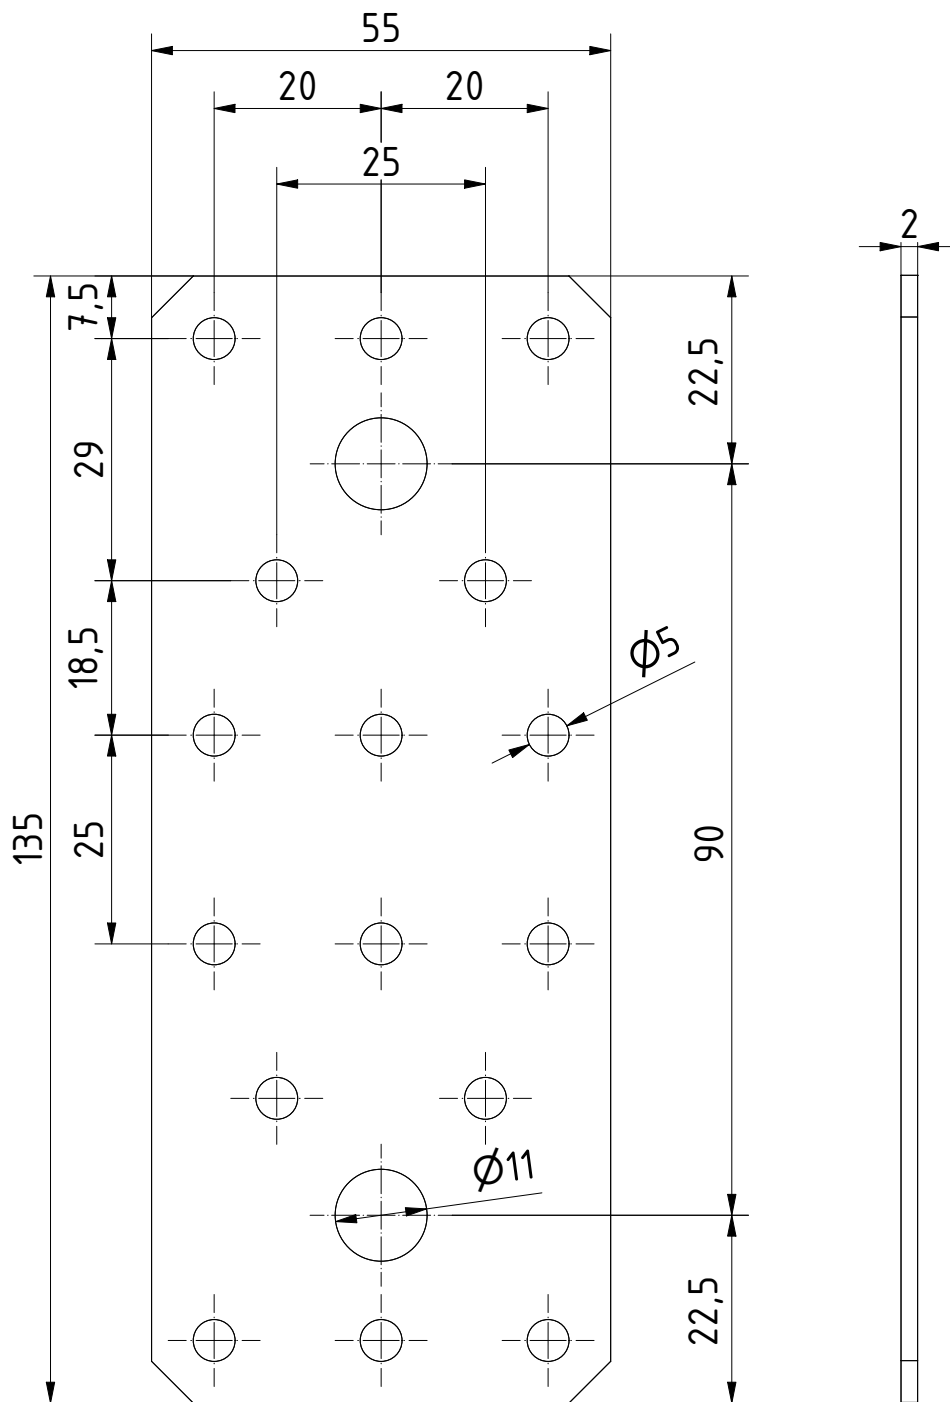

Front view

If you are not familiar with how this product is used, and particularly with the product's intended use, please contact our Application Technology department (technik@eurotec.team).