

PRODUCT DATA SHEET

OSB FIX

PRODUCT DESCRIPTION

OSB Fix is made of carbon steel (yellow galvanized) and is suitable for **all wood materials**. The screw is available as a countersunk head version.

The fully threaded screw has a **60° countersunk head with milling ribs** and TX drive – a so-called tip with scraping groove (type 17). The special geometry of the screw ensures a **reduced splitting effect when screwing in**.

ADVANTAGES


- The special geometry of the tip minimizes the splitting effect
- No pre-drilling required
- Screws can be screwed in smoothly thanks to the TX drive
- Fully threaded to hold the plate in position
- Prevents creaking sounds
- Suitable for all wood materials

MATERIAL

Tempered carbon steel, yellow galvanized

- Corrosion-resistant
- Suitable for use in service classes 1 and 2 pursuant to DIN EN 1995 - Eurocode
- High mechanical stress resistance
- Not suitable for wood containing tannins

CERTIFICATIONS

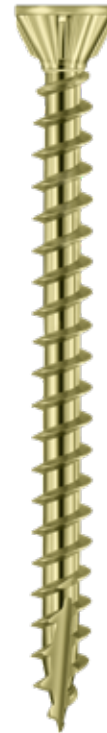

APPLICATION IMAGE



OSB Fix when screwing in

PRODUCT DATA SHEET

OSB FIX


PRODUCT TABLE

OSB Fix, yellow galvanized				
Art. no.	Dimensions $\varnothing d \times L$ [mm]	Head diameter $\varnothing dh$ [mm]	Drive	PU
900690	4.3 x 40	7	TX20 ●	250
900691	4.3 x 45	7	TX20 ●	250
900692	4.3 x 50	7	TX20 ●	250
900693	4.3 x 60	7	TX20 ●	250
900694	4.3 x 80	7	TX20 ●	250

DRAWINGS



Top view

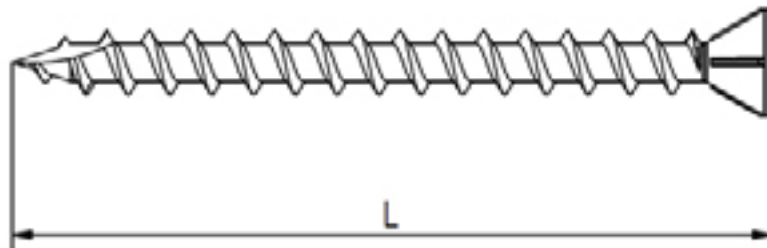

Side view

If you are unfamiliar with the application of this product, in particular with its intended use, please contact our Application Technology Department (technik@eurotec.team).