

PRODUCT DATA SHEET

TENAX SPACER

PRODUCT DESCRIPTION

If deck boards are to be screwed directly, ie visibly, the Tenax serves as a spacer to the underlay to prevent waterlogging in the joint. By placing the boards on top, the joint gap of 6 mm and the clearance to the substructure are set.




ADVANTAGES

- Reduces shearing of fastening screws
- Uniform joint spacing
- Weather-resistant

MATERIAL

- Plastic, black

IMAGES OF APPLICATIONS

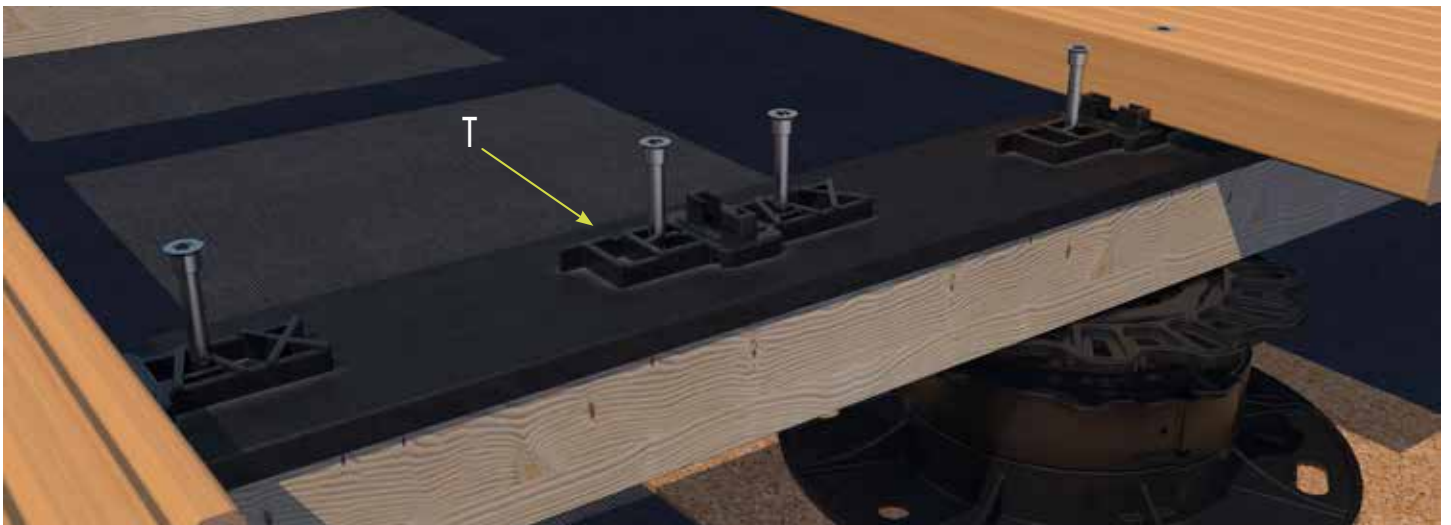

The Tenax spacer (T) with a wooden substructure

PRODUCT DATA SHEET

TENAX SPACER



Note

Since the Tenax system is not suitable for materials that swell and shrink significantly, it should only be used for WPC and thermally modified boards.


Min. board width 80 mm
Max. board thickness 30 mm

PRODUCT TABLE


Tenax spacer

Art.-No.	Product description	Height [mm]	Depth [mm]	Width [mm]	PU
945968	Tenax spacer	11	30	86	300

DRAWINGS

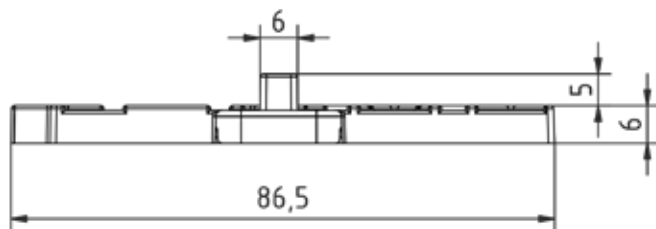

Side view



Side view



Top view

If you are not familiar with how this product is used, and particularly with the product's intended use, please contact our Application Technology department (technik@eurotec.team).