

PRODUCT DATA SHEET

FLOORFIX

PRODUCT DESCRIPTION

Stainless steel FloorFix screws are suitable for affixing panel materials, solid wood boards, etc. to wood. The screw has a scraper groove at the screw tip and is available as a countersunk head screw. The screw's special geometry ensures a lower splitting effect when screwing in.

ADVANTAGES

- The special screw geometry decreases the risk of splitting the wood
 - → No pilot drilling necessary
- · A2 and A4 stainless steel offers a very wide range of applications
- · Screws can be screwed in smoothly thanks to the TX drive
- Wood construction screw according to DIN EN 14592, CE-certified



MATERIAL

Austenitic stainless steel V2A 1.4301/X5CrNi18-10 (stainless steel according to EN 10088 and technical approval Z-30.3-6)

- · Can be used in service classes 1 to 3 according to DIN EN 1995 (Eurocode 5)
- · Resistant to rust to a limited extent
- Suitable for atmospheres containing salt to a limited extent
- Acid-resistant to a limited extent
- · Not suitable for use in aggressive conditions and chlorinated environments

APPROVAL


European Technical Assessment EN 14592:2008+A1:2012





© by E.u.r.o.Tec GmbH \cdot Last updated 08/2022 \cdot Subject to changes, additions, typesetting and printing errors.

Page 1 of 3



PRODUCT DATA SHEET

FLOORFIX


MATERIAL

Austenitic stainless steel V4A 1.4401/X5CrNiMo17-12-2 (stainless steel according to EN 10088 and technical approval Z-30.3-6)

- Can be used in service classes 1 to 3 according to DIN EN 1995 (Eurocode 5)
- Resistant to rust
- · Suitable for atmospheres containing salt
- Acid-resistant suitable for wood containing tannins
- Good resistance in moderately aggressive environments that do not contain chlorine

PRODUCT TABLE

		FloorFix			
Art. no.	Dimensions Ød x L [mm]	Thread length lg [mm]	Head diameter Ødh [mm]	Drive	PU
		A2 stainless steel			
945194	4.2 x 42	25	7.0	TX20 -	250
945195	4.2 x 55	32	7.0	TX20 -	250
945196	4.8 x 75	45	7.8	TX20 🗢	250
		A4 stainless steel			
945190	4.2 x 42	25	7.0	TX25 •	250
945191	4.2 x 55	32	7.0	TX25 -	250
945192	4.8 x 75	45	7.8	TX25 •	250




PRODUCT DATA SHEET

FLOORFIX

DRAWINGS

· FloorFix countersunk head, stainless steel A2 or A4

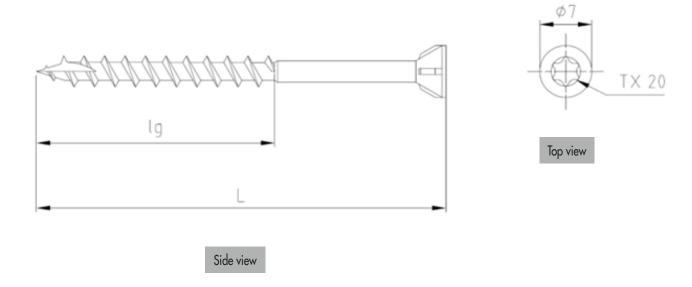

If you are not familiar with this product's application, and particularly with the product's intended use, please contact our Application Technology department (technik@eurotec.team).