# **PRODUCT DATA SHEET**

## STARTERCLIP

### PRODUCT DESCRIPTION

If decking boards are fastened indirectly/not visibly, then the edging on the surrounding structures (e.g. houses or walls) poses a particular challenge.

The Eurotec StarterClip has been specially developed for these edgings.






#### ADVANTAGES AND SPECIFICATIONS

- Indirect/concealed fastening solution for edging
- Supports design-based wood preservation thanks to approx. 10 mm board distance from substructure
- Weather-resistant



#### MATERIAL

• Polyamide 66 with 30% glass fibre reinforcement (PA 66-GF 30) in black

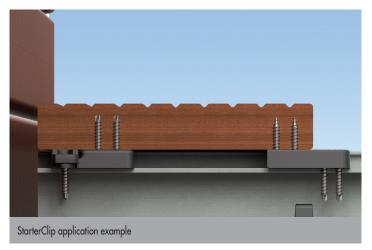

APPLICATION IMAGE

 $\ensuremath{\mathbb{C}}$  by E.u.r.o.Tec GmbH  $\cdot$  Last updated 12/2022  $\cdot$  Subject to changes, additions, typesetting and printing errors.

Page 1 of 3

E.u.r.o.Tec GmbH • Unter dem Hofe 5 • 58099 Hagen, Germany Tel. +49 (0)2331 62 45-0 • Fax +49 (0)2331 62 45-200 • Email info@eurotec.team

www.eurotec.team

# **PRODUCT DATA SHEET**

### **STARTERCLIP**

#### PRODUCT TABLE

Art. no.	Material	PU*
975591	Hard plastic	10
*40		

\*40 system screws are included in the scope of delivery

### TORQUE



USE LOW TORQUE

Excessive torque can cause damage to or malfunction of the connection. So make sure that you adjust the torque setting and switch off the impact function on your screwdriver.

#### INSTRUCTIONS FOR USE

The StarterClip may only be used for dimensionally stable decking. Dimensionally stable decking includes the following timber types, treatment methods and composite materials:

- Larch
- Douglas fir
- Wood-polymer composites (WPC)
- Thermowoods made of softwoods and hardwoods
- Acetylate wood

It is not recommended to use the StarterClip for timber with high bulk density and/or high swelling and shrinkage and only moderate resilience (dimensional stability). This particularly applies to the cumaru, ipe, macaranduba and robinia (false acacia) wood types. When selecting the wood, particular attention should be paid to thorough sorting (such as removing boards with interlocked grain and so-called wavy grain boards) and good conditioning (target moisture content) of the decking boards. If necessary, the suitability of the wood type must be determined by the manufacturer / wood supplier.

The Eurotec StarterClip is suitable in conjunction with the following products:

- Aluminium system profiles (except for EVO Light & Eveco aluminium system profile)
- HKP support profile
- Deck glider/Mini-deck glider
- T-Stick
- Tenax spacer

© by E.u.r.o.Tec GmbH · Last updated 12/2022 · Subject to changes, additions, typesetting and printing errors.


Page 2 of 3

E.u.r.o.Tec GmbH • Unter dem Hofe 5 • 58099 Hagen, Germany Tel. +49 (0)2331 62 45-0 • Fax +49 (0)2331 62 45-200 • Email info@eurotec.team

## **PRODUCT DATA SHEET**

### STARTERCLIP

#### DRAWINGS

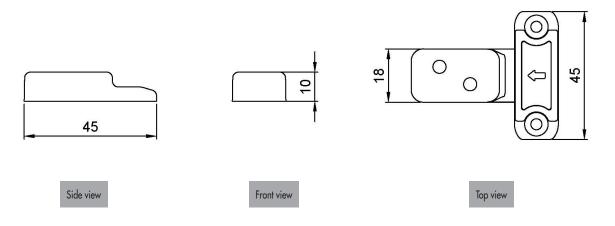

If you are not familiar with how to use this product, especially with its intended use, get in touch with our Application Engineering Department (technik@eurotec.team).

 $\textcircled{o} by \ \texttt{E.u.r.o.Tec GmbH} \cdot \texttt{Last updated} \ \texttt{12/2022} \cdot \texttt{Subject to changes, additions, typesetting and printing errors. }$ 

E.u.r.o.Tec GmbH • Unter dem Hofe 5 • 58099 Hagen, Germany Tel. +49 (0)2331 62 45-0 • Fax +49 (0)2331 62 45-200 • Email info@eurotec.team