


PRODUCT DATA SHEET

DECKING CLIP RI4

PRODUCT DESCRIPTION

The RI4 clip can be used to fasten laterally grooved boards to wooden substructures. The clip creates a uniform spacing 5 mm spacing between the boards. It is ideal for boards with a symmetrical groove, such as WPC or hardwood boards. Due to galvanization, the clip can be used in all 3 usage classes according to DIN EN 1995 (Eurocode 5).

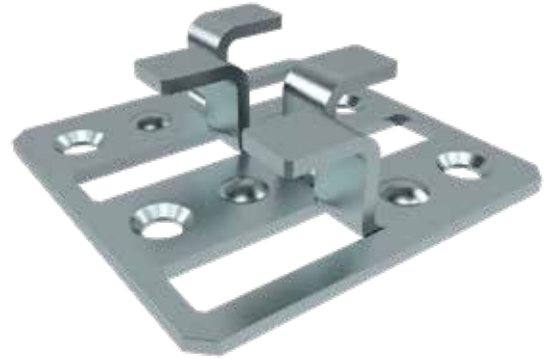

ADVANTAGES / SPECIFICATIONS

- Indirect / invisible fastening solution
- Compatible with classic wooden substructures
- Uniform plank spacing of 5 mm
- Screws included in the package:
400x Paneltwistec 1000 countersunk head 3.0 x 25 (Art. no.: R903039)

MATERIAL

- Hot-dip galvanised carbon steel (DX51D + Z275)
- Can be used in utilisation classes 1 to 3 in accordance with DIN EN 1995 (Eurocode 5)
- Not suitable for salty atmospheres
- Not suitable for use in aggressive and chlorinated environments




NKL 1 – 3

PRODUCT DATA SHEET

DECKING CLIP RI4

TECHNICAL INFORMATION

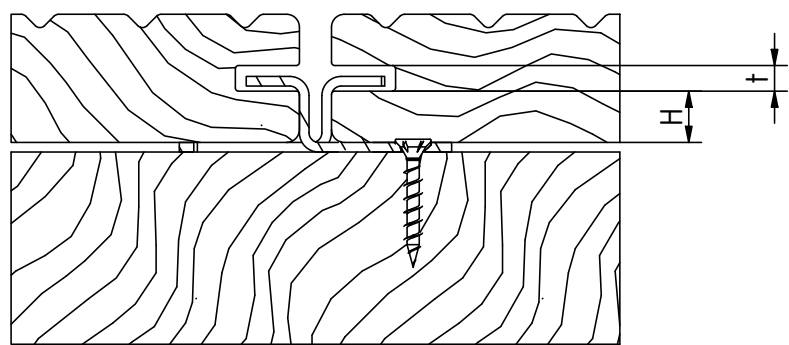

Symmetrical groove	
Minimum thickness	t = 3 mm
Recommended height	H = 7 – 8 mm

PRODUCT TABLE

Decking Clip RI4			
Art. no.	Material	Accessories	PU
111800	DX51D + Z275	Panelwistec 1000 countersunk head screw 3,0 x 25 (Art. no. R903039)	200

If you are not familiar with how this product is used, and particularly with the product's intended use, please contact our Application Technology department (Technik@eurotec.team).