

44-1 Handy, 2-jaw industrial puller with power-transmitting and 2-jaw self-centering jaws



DESCRIPTION

The handy 2-jaw industrial puller with power-transmitting and self-centering jaws is used for pulling bearings, gears and discs in all common sizes for trade, workshop and industry. It can be used to remove any component that sits on a shaft and is freely accessible from the outside. When the spindle pressure is built up, the jaws connected to each other grip the part to be pulled tighter and tighter.

RANGE OF APPLICATION

For pulling off bearings, gear wheels and discs

BENEFIT

- Self-centring of the legs by manually tightening the Spindle (Autogrip Technology)
- Secure positioning of the Spindle thanks to the rotatable spindle tip, both on smooth surfaces and when centring (Switch Technology)
- Anti-slip guard on the spindle head for safe working with wrench
- Spindle riser protects the threading

OPERATION

- Place the jaws on the part to be pulled from the outside
- Swivel the claws under the component
- Pull the Spindle manually under pressure to fix it in place
- Move the hexagon on the spindle head with a ratchet or combination spanner until the component is released

MASTER DATA

GTIN [EAN]	4021176016028
Country of origin	DE
Case material	Tool steel
Series	44
Gross weight [kg]	0,525 kg
Package contents	1 piece
Packaging Act	PAP 21
Global sales capability given	Yes

SPARE PARTS

- 44-1-T_2-arm Crossbeam
- 44-1-100-P_2 Hook (pair)
- 44-1-206_Spindle with bushing
- 612130_Mechanical pressure spindle
- 612140_Two-sided spindle tip


APPLICATION IMAGE




DETAIL IMAGE




Handy, 2-jaw industrial puller with power-transmitting and 2-jaw self-centering jaws

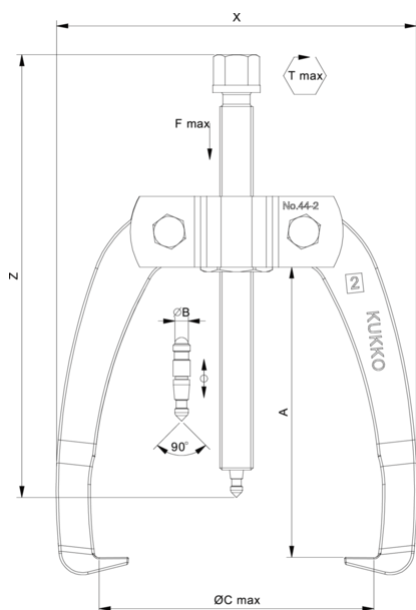

Abbreviation	Attribut	Wert
X	Total width [mm]	123 mm
Y	Total depth [mm]	30 mm
Z	Total height [mm]	150 mm
A	Clamping depth outside pull-off [mm]	100 mm
S1	Width across flats [mm]	13 mm
Cmin	Span outside pull-off (min.) [mm]	0 mm
Cmax	Span outside pull-off (max.) [mm]	100 mm
K	Hook root thickness at the tip (claw thickness K) [mm]	3 mm
J	Hook base width (claw width J) [mm]	16 mm
O	Hook base depth usable (claw depth usable O) [mm]	11,5 mm
H	Total hook root depth (total claw depth H) [mm]	23 mm
L	Total claw thickness (L+1mm) (claw distance to base surface) [mm]	6,5 mm
Tmax	Max. torque [Nm]	50 Nm
Fmax	Max. tractive force [t]	3 t
Fmax	Max. tensile force [kN]	30 kN



Abbreviation	Attribut	Wert
X	Total width [mm]	123 mm
Y	Total depth [mm]	30 mm
Z	Total height [mm]	150 mm
A	Clamping depth outside pull-off [mm]	100 mm
S1	Width across flats [mm]	13 mm
Cmin	Span outside pull-off (min.) [mm]	0 mm
Cmax	Span outside pull-off (max.) [mm]	100 mm
K	Hook root thickness at the tip (claw thickness K) [mm]	3 mm
J	Hook base width (claw width J) [mm]	16 mm
O	Hook base depth usable (claw depth usable O) [mm]	11,5 mm
H	Total hook root depth (total claw depth H) [mm]	23 mm
L	Total claw thickness (L+1mm) (claw distance to base surface) [mm]	6,5 mm
Tmax	Max. torque [Nm]	50 Nm
Fmax	Max. tractive force [t]	3 t
Fmax	Max. tensile force [kN]	30 kN

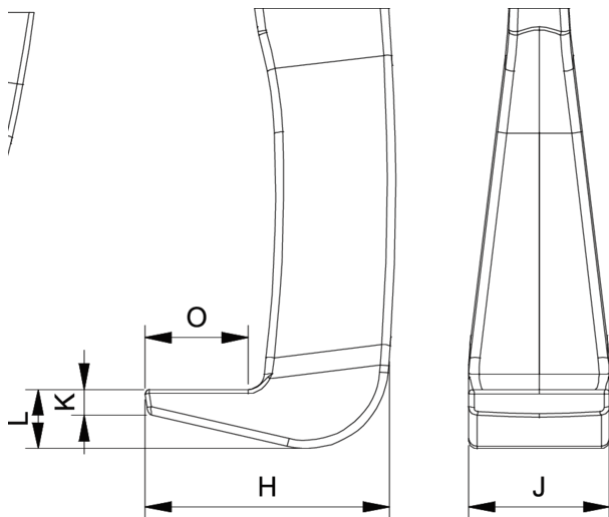

Abbreviation	Attribut	Wert
X	Total width [mm]	123 mm
Y	Total depth [mm]	30 mm
Z	Total height [mm]	150 mm
A	Clamping depth outside pull-off [mm]	100 mm
S1	Width across flats [mm]	13 mm
Cmin	Span outside pull-off (min.) [mm]	0 mm
Cmax	Span outside pull-off (max.) [mm]	100 mm
K	Hook root thickness at the tip (claw thickness K) [mm]	3 mm
J	Hook base width (claw width J) [mm]	16 mm
O	Hook base depth usable (claw depth usable O) [mm]	11,5 mm
H	Total hook root depth (total claw depth H) [mm]	23 mm
L	Total claw thickness (L+1mm) (claw distance to base surface) [mm]	6,5 mm
Tmax	Max. torque [Nm]	50 Nm
Fmax	Max. tractive force [t]	3 t
Fmax	Max. tensile force [kN]	30 kN