




Abbildung

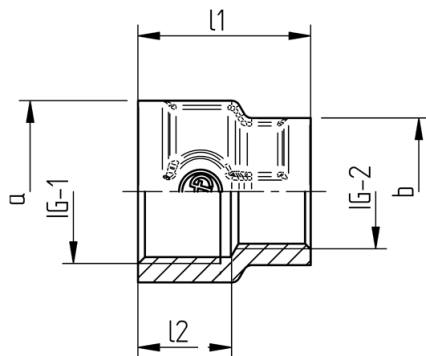

Details

Anschluss: G ... IG x G ... IG (DIN ISO 228), aus Pressmessing nach DIN EN 12164 / 12165

Ausführung

Oberfläche	blank / chrom
Durchflussmedium	Trinkwasser
Gewinde	DIN ISO 228
Werkstoff	CuZn40Pb2 (CW617N)

Gewinde (G)	l1 (mm)	l2 (mm)	a (mm)	b (mm)
Oberfläche: blank				
3/8" x 1/4"	23	12	Ø 23	Ø 18
1/2" x 1/4"	27	15	Ø 27	Ø 23
1/2" x 3/8"	27	14	Ø 27	Ø 23
3/4" x 1/2"	30	18,5	Ø 34	Ø 27
1" x 1/2"	36	21,5	Ø 41	Ø 27
1" x 3/4"	40	21,5	Ø 41	Ø 34
1 1/4" x 3/4"	43	21,4	Ø 51,5	Ø 42
1 1/4" x 1"	43	21,4	Ø 51,5	Ø 42
1 1/2" x 1"	43	21,4	Ø 58	Ø 42
1 1/2" x 1 1/4"	43	21,4	Ø 58	Ø 51,5
2" x 1 1/4"	50	25,7	Ø 70	Ø 58
2" x 1 1/2"	50	25,7	Ø 70	Ø 58

Gewinde (G)	l1 (mm)	l2 (mm)	a (mm)	b (mm)
Oberfläche: chrom				
3/8" x 1/4"	23	12	Ø 23	Ø 18
1/2" x 1/4"	27	15	Ø 27	Ø 23
1/2" x 3/8"	27	14	Ø 27	Ø 23
3/4" x 1/2"	30	18,5	Ø 34	Ø 27
1" x 1/2"	36	21,5	Ø 41	Ø 27
1" x 3/4"	40	21,5	Ø 41	Ø 34

Sonderausführungen auf Anfrage



Pos.	Stck.	Ausschreibungstext
		Art.-Nr.: ☐ 1971 (blank) ☐ 1971 (chrom) Gewinde (G): ☐ 3/8" x 1/4" ☐ 3/4" x 1/2" ☐ 1 1/4" x 3/4" ☐ 1 1/4" x 3/4" ☐ _____ ☐ 1/2" x 1/4" ☐ 1" x 1/2" ☐ 1 1/4" x 1" ☐ 2" x 1 1/4" ☐ _____ ☐ 1/2" x 3/8" ☐ 1" x 3/4" ☐ 1 1/2" x 1" ☐ 2" x 1 1/2"
		Details: Anschluss: G ..." IG x G ..." IG (DIN ISO 228), aus Pressmes- sing nach DIN EN 12164 / 12165