

# 44-2 Handy, 2-jaw industrial puller with power-transmitting and 2-jaw self-centering jaws



APPLICATION IMAGE



DETAIL IMAGE



## DESCRIPTION

The handy 2-jaw industrial puller with power-transmitting and self-centering jaws is used for pulling bearings, gears and discs in all common sizes for trade, workshop and industry. It can be used to remove any component that sits on a shaft and is freely accessible from the outside. When the spindle pressure is built up, the jaws connected to each other grip the part to be pulled tighter and tighter.

## RANGE OF APPLICATION

For pulling off bearings, gear wheels and discs

## BENEFIT

- Self-centring of the legs by manually tightening the Spindle (Autogrip Technology)
- Secure positioning of the Spindle thanks to the rotatable spindle tip, both on smooth surfaces and when centring (Switch Technology)
- Anti-slip guard on the spindle head for safe working with wrench
- Spindle riser protects the threading

## OPERATION

- Place the jaws on the part to be pulled from the outside
- Swivel the claws under the component
- Pull the Spindle manually under pressure to fix it in place
- Move the hexagon on the spindle head with a ratchet or combination spanner until the component is released


## MASTER DATA

GTIN [EAN]	4021176016103
Country of origin	DE
Case material	Tool steel
Series	44
Gross weight [kg]	1 kg
Package contents	1 piece
Packaging Act	PAP 21
Global sales capability given	Yes

## SPARE PARTS


- 44-2-T\_2-arm Crossbeam
- 44-2-120-P\_2 Hook (pair)
- 44-2-206\_Spindle with bushing
- 614160\_Mechanical pressure spindle
- 612140\_Two-sided spindle tip

# Handy, 2-jaw industrial puller with power-transmitting and 2-jaw self-centering jaws

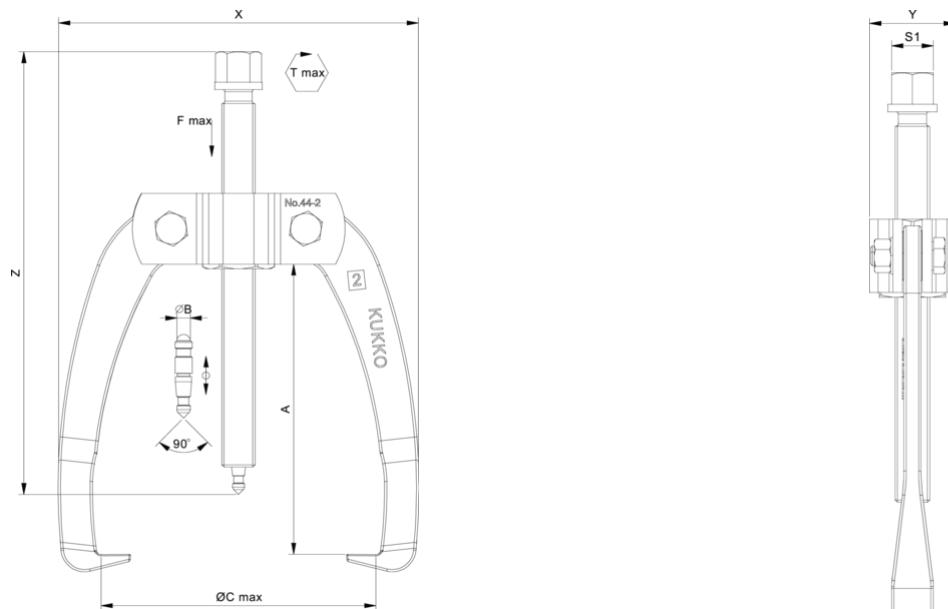


Attribut	Wert
X	Total width [mm]
Y	35 mm
Z	181 mm
A	120 mm
S1	17 mm
Cmin	0 mm
Cmax	120 mm
K	3 mm
J	17 mm
O	14 mm
H	32 mm
L	10 mm
Tmax	85 Nm
Fmax	5 t
Fmax	50 kN

Attribut	Wert
X	156 mm
Y	35 mm
Z	181 mm
A	120 mm
S1	17 mm
Cmin	0 mm
Cmax	120 mm
K	3 mm
J	17 mm
O	14 mm
H	32 mm
L	10 mm
Tmax	85 Nm
Fmax	5 t
Fmax	50 kN

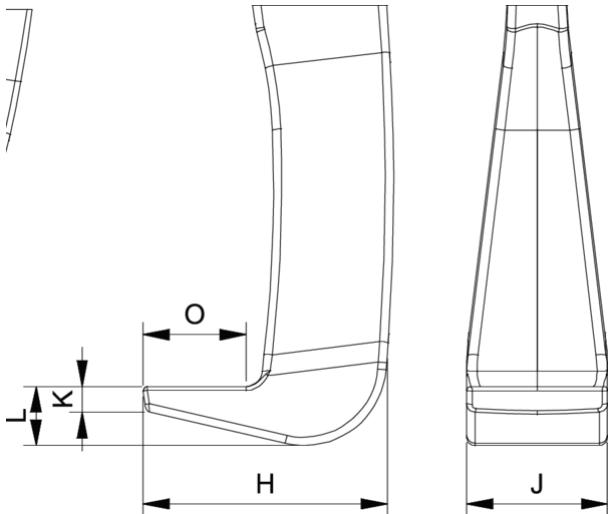

Attribut	Wert
X	Total width [mm]
Y	Total depth [mm]
Z	Total height [mm]
A	Clamping depth outside pull-off [mm]
S1	Width across flats [mm]
Cmin	Span outside pull-off (min.) [mm]
Cmax	Span outside pull-off (max.) [mm]
K	Hook root thickness at the tip (claw thickness K) [mm]
J	Hook base width (claw width J) [mm]
O	Hook base depth usable (claw depth usable O) [mm]
H	Total hook root depth (total claw depth H) [mm]
L	Total claw thickness (L+1mm) (claw distance to base surface) [mm]
Tmax	Max. torque [Nm]
Fmax	Max. tractive force [t]
Fmax	Max. tensile force [kN]

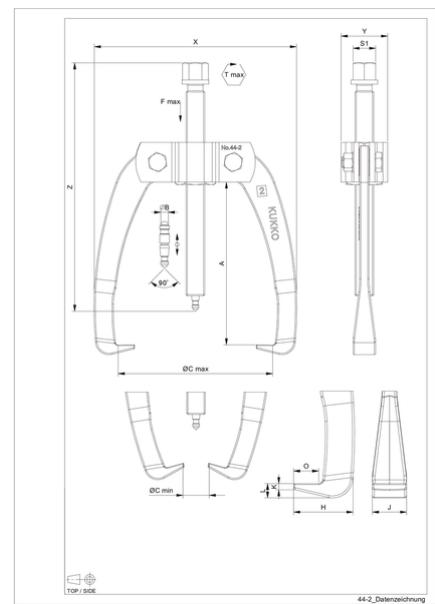

Attribut	Wert
X	Total width [mm]
Y	Total depth [mm]
Z	Total height [mm]
A	Clamping depth outside pull-off [mm]
S1	Width across flats [mm]
Cmin	Span outside pull-off (min.) [mm]
Cmax	Span outside pull-off (max.) [mm]
K	Hook root thickness at the tip (claw thickness K) [mm]
J	Hook base width (claw width J) [mm]
O	Hook base depth usable (claw depth usable O) [mm]
H	Total hook root depth (total claw depth H) [mm]
L	Total claw thickness (L+1mm) (claw distance to base surface) [mm]
Tmax	Max. torque [Nm]
Fmax	Max. tractive force [t]
Fmax	Max. tensile force [kN]