PRODUCT DATA SHEET

PRODUCT DESCRIPTION

The Eurotec Flex-Stone-Clip and Stone-Edge-Clip are specially designed for the Eurotec EVO and EVO Slim aluminium system profile, and for the HKP terrace support system. It can also be used in combination with Eurotec adjustable feet. When combined with the Eurotec adjustable feet, it is possible to create a so far unique, professional elevation of the substructure for all types of concrete and natural stone slabs.

FLEX-STONE-CLIP ADVANTAGES

- · For clipping onto the aluminium system profiles in the installation location
- The new Flex Stone Clip is flexible enough to compensate for production-related tolerances of up to 2 mm in stone slabs.
- · The joint width is 4 mm


STONE-EDGE-CLIP ADVANTAGES

- · For clipping onto the edge of the aluminium system profiles
- To prevent the stone slabs from slipping in the area around the edges, it is necessary to fix the clips with a profile drilling screw of 4.2 x 35 mm.
- The joint width is 4 mm

MATFRIAI

· Polypropylene

IMAGES OF APPLICATIONS

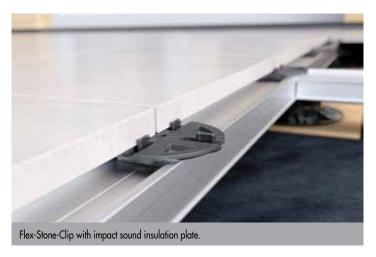

© by E.u.r.o.Tec GmbH \cdot Last updated 08/2024 \cdot Subject to changes, additions, typesetting and printing errors.

FLEX-STONE-CLIP AND STONE-EDGE-CLIP





Flex-Stone-Clip

Stone-Edge-Clip



Aluminium profile drilling screw





Impact sound insulation plate Ø 90 mm

Notes

The Stone-Edge-Clip is only used to prevent the stone slabs from slipping sideways. Due to the lever arm effect, it does not serve as a load-bearing structure against mechanical loads.



Page 1 of 3

PRODUCT DATA SHEET

FLEX-STONE-CLIP AND STONE-EDGE-CLIP


PRODUCT TABLE


| Art. no. | Joint strip dimensions [mm] ^{a)} | Drive | | PU |
|----------------------------------|---|--------|--|------|
| Flex-Stone-Clip | | | | |
| 975602 | 8 × 14 × 4 | | | 200* |
| Stone-Edge-Clip | | | | |
| 975603 | 8 × 14 × 4 | | | 50** |
| Aluminium profile drilling screw | | | | |
| 645026 | 4.2 × 35 | TX15 • | | 100 |


 $^{^{\}text{o})}$ Height imes length imes width

DRAWINGS

· Flex-Stone-Clip








^{*} We recommend using special aluminium profile screws (645026) for attachment. They are not part of the scope of the delivery.


^{**} Delivery including one screw per clip


PRODUCT DATA SHEET


FLEX-STONE-CLIP AND STONE-EDGE-**CLIP**

· Stone-Edge-Clip









If you are not familiar with how to use this product, especially with its intended use, get in touch with our Application Engineering Department (technik@eurotec.team).